Sapphire™ Floor Standing Intelligent Toilet



Colour/Finish
- White

Included Components
- Sapphire intelligent toilet & remote control
- Angle valve with removable filter
- Vario pan connector for S-trap installation
- Braided Stainless Steel water supply hoses
- Floor fixing hardware

Set-out
- P-Trap installation: 180mm
- S-Trap installation: 95mm - 110mm

Features
- Revolution 360° ™ flushing
- Rear & feminine wash functions
- Instantly heated water with selectable temperature control
- Adjustable water volume & spray position
- Self-cleaning wand before & after each use
- Anti-bacterial seat & wand materials
- Heated seat with adjustable temperature control
- Auto lid opening/closing with foot sensor activation
- Pre-use bowl mist
- Auto flushing after use
- Warm air drying system with adjustable temperature control
- Built-in deodorising system
- Side control or wireless remote for one-touch operation
- Seat occupancy sensor
- Integrated plasma sterilization system for bowl hygiene
- Night light
- Energy-saving mode
- Seat & water heater leakage & overheating protection
- IP Rating: IPX4


Notes:
- Must be installed with RCD or GFCI electrical protection.
- Power source: 220-240V, 50Hz.
- Inlet water pressure range: 80kPa - 500kPa.
- Inlet water temperature range: 3°C - 35°C.
- Maximum user weight: 150kg.
- The bidet seat has an integral Air Gap that complies with AS2845.2:2025. Before installation, check with local authorities to confirm if an additional Reduced Pressure Zone Device (RPZD) is required.

AS 1172.1
AS 1172.2
WM-022014

The more stars the more water efficient
WATER RATING
www.waterrating.gov.au
3.5 litres average flush
4.5 L per full flush / 3 L per half flush
In accordance with AS/NZS 6400
Licence No. 0060
Kohler New Zealand Ltd


Product	Code
Englefield Sapphire Floor Standing Intelligent Toilet	42573A-W3

Rough-In (in mm)

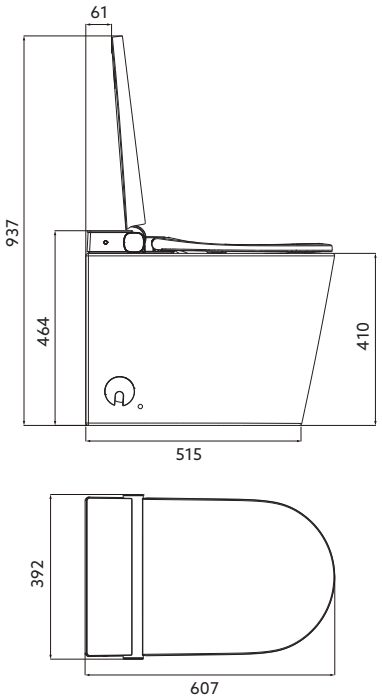

Set-Out

P-Trap Installation
(pan connector not supplied)

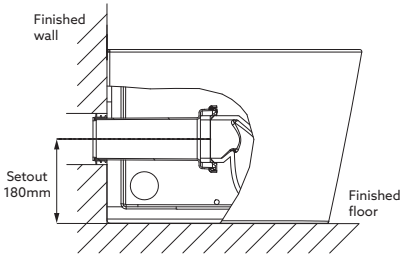

S-Trap Installation
(with supplied vario pan connector)

