



HydroTap G5 BC20 Classic Plus Chrome

Boiling Chilled



Finish: Chrome

Product code: H55702Z00NZ

Capacity: Commercial

Zenith HydroTap Classic Plus Boiling, Chilled, Filtered water features simple, intuitive controls including continuous flow to fill bottles, Boiling water safety lock, and antimicrobial protection impregnated within the new Classic Plus touch-pad for enhanced hygiene. The water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 boiling water safety modes, 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration.

Specifications

Product name	HydroTap G5 BC20 Classic Plus Chrome
Product code	H55702Z00NZ
Filtered water type	BC
Product approvals	WaterMark, RCM, ARC
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Capacity, weight & dimensions

Number of people	20
Boiling cups per hour	100
Chilled cups per hour	75

Plumbing

Water supply requirements	Cold
Water connection	1/2" BSP (G1/2)
Water valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Water pressure	Min 170kPa - Max 700kPa

Electrical

Power rating	1.9kW 220-240V 50Hz
Power supply	1 × 10 Amp socket outlet

Tap design

Tap	Zenith HydroTap CLASSIC PLUS Tap (Chrome)
HydroTap style	Classic Plus
Finish	Chrome

Command centre

Dimensions W280mm x D478mm x H333mm


Installation

Installation requirements

- 1. Installation and connection of your Zenith HydroTap must be carried out by a qualified person, observing national and local regulations.
- 2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
- 3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.
- 4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
- 5. If you live in a hard water area, we recommend installation of a Zenith scale filtration kit.
- 6. Installation by Zenith Professional Service can be arranged with a phone call or through www.zenithwater.co.nz

Files

Installation Layout 3D (DWG)

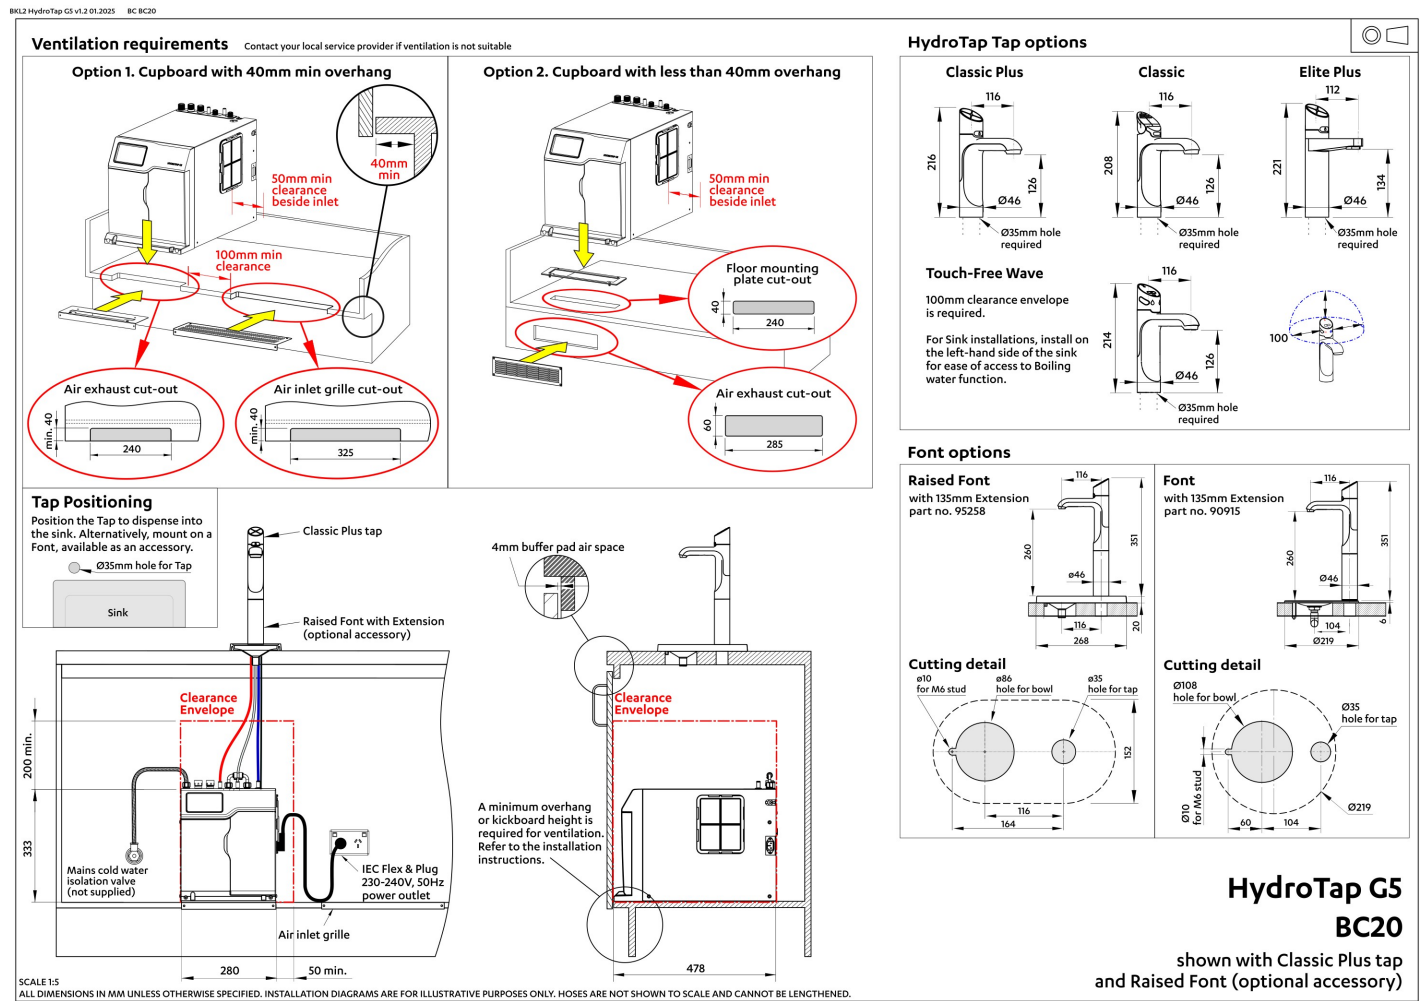

Installation Layout (PDF)

BIM files

LCF

↓ ArchiCAD Swift
Globals Library
(LCF)

LCF

↓ ArchiCAD Zenith
Water Library (LCF)

ZIP


↓ Revit Project File
(RFA)


RVT


↓ Revit Virtual
Showroom (RVT)


↓ Download all


Certifications



ARC
AU02691



WaterMark
WMKA00099
AS 3498



Telarc.
Registered
Environment
ISO 14001


EPD
INTERNATIONAL EPD SYSTEM




Telarc.
Registered
Health &
Safety
ISO 45001


Telarc.
Registered
Quality
ISO 9001



PDF

↓ ARC (PDF)

PDF

↓ Environment ISO
(PDF)

PDF

↓ Environmental
Product Declaration
Brochure (PDF)

PDF

↓ Filter performance
(PDF)

PDF

↓ Health & Safety
(PDF)

PDF

↓ HydroTap Clean
SDS (PDF)

PDF

↓ Quality ISO (PDF)


Product data current as at: January 12, 2026 at 23:04

Page 4 of 5


Product code: H55702Z00NZ

Manuals & brochures


PDF

 Brochure (PDF)


PDF

 Instruction manual (PDF)

PDF

 Quick guide (PDF)

PDF

 User manual (PDF)

 Download all