SRobinhood


Description

ROBINHOOD SUPERTUB SERIES 3 WORKSTATION S/S GOOSENECK TAP ST1200





Dimensions

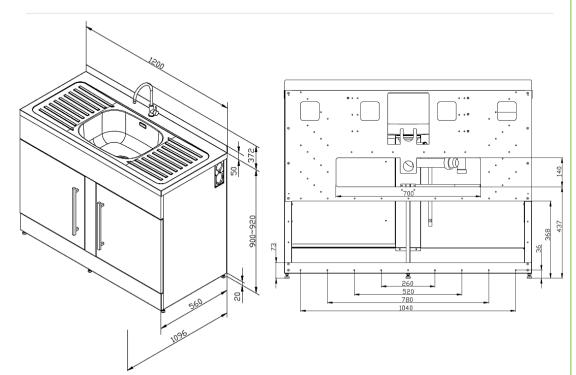

Specifications

Tapware

Tapware	
Tapware type	#304 Stainless Steel Gooseneck Tap
WELS rating	5 Stars, 5.5L per minute
Max & Min pressure	Maximum pressure 72.5 PSI (500 kPa); Minimum pressure 22 PSI (150 kPa)
Temperature range	Recommended temperature range 5° to 65°C; Maximum temperature 80°C
Sink	
Bowl type	0.8mm polished #304 Stainless Steel
Bowl capacity	32L gross capacity measured to the top; 25.5L capacity to overflow
Waste type/ discharge flow rate	Modern basket waste/ 52L per minute
Overflow/ Flow rate	Yes, modern overflow design/ 18L per minute
Cabinet	
Handle type	2x Square brushed pole handles
No. of doors	2 doors
Internal shelf and floor	2 sets (1 set with waste pipe cut-outs)
Maximum height of items can be stored	Top: 235mm; Bottom: 380mm
Plumbing kit	Included, can be adjusted to left or right hand side installation
Adjustable levelling feet	Yes
Side apertures for hoses	Yes, on both sides
3 Way ball valves isolators	Yes, included
Washing machine waste pipe	Separate
Cabinet color/finish	
	Satin white/powder coated
Cabinet material	Satin white/powder coated 0.6mm galvanized steel
Cabinet material Dimensions & Weights	
-	
Dimensions & Weights	0.6mm galvanized steel
Dimensions & Weights Product dimensions (mm)	0.6mm galvanized steel W1200*D565*H(900-920)
Dimensions & Weights Product dimensions (mm) Carton dimensions (mm)	0.6mm galvanized steel W1200*D565*H(900-920) W1218*D582*H975
Dimensions & Weights Product dimensions (mm) Carton dimensions (mm) Gross/Net weight (Kg)	0.6mm galvanized steel W1200*D565*H(900-920) W1218*D582*H975

Dated 13/06/2022