₩Robinhood

Description


ROBINHOOD STANDARD SUPERTUB SERIES 3 CONSOLE CONTROL S/S GOOSENECK TAP







Dimensions

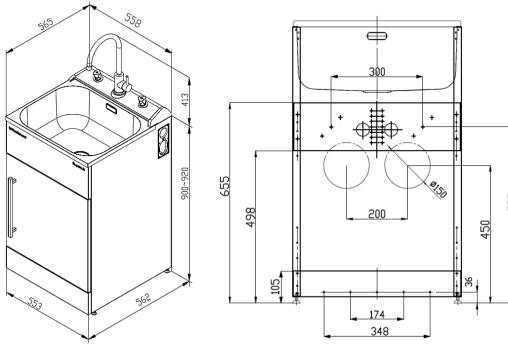

Dated 13/06/2022

Specifications

Tapware

Tapware type #304 Stainless Steel Gooseneck Tap

WELS rating 5 Stars, 5.5L per minute

Max & Min pressure

Maximum pressure 72.5 PSI (500 kPa);

Minimum pressure 22 PSI (150 kPa)

Temperature range S° to 65°C;

Maximum temperature 80°C

Sink

Bowl type 0.8mm polished #304 Stainless Steel 38L gross capacity measured to the top:

Bowl capacity 30L capacity to overflow

Waste type/ discharge flow

rate

Modern basket waste/ 52L per minute

Overflow/ Flow rate Yes, modern overflow design/ 18L per minute

Cabinet

Handle type 1x Square brushed pole handle

Door opening Reversible, can be either left or right hand opening

Internal shelf and floor Yes

toma can

Maximum height of items can

be stored

Top: 210mm; Bottom: 410mm

Adjustable levelling feet Yes

Side apertures for hoses Yes, on both sides

Washing machine taps
Console control
3 Way ball valves isolators
Yes, included

Washing machine waste pipe Separate

Cabinet color/finish Satin white/powder coated

Cabinet material 0.6mm galvanized steel

Dimensions & Weights

Product dimensions (mm) W558*D565*H(900-920)

Carton dimensions (mm) W575*D585*H965

Gross/Net weight (Kg) 21/18

Warranty

Tapware & Cabinet 2 years on parts & labour from the date of purchase

Sink 5 years on parts & labour from the date of purchase