



## Description

ROBINHOOD SLIM SUPERTUB WITH S/S GOOSENECK TAP  
STSLIMTAPX

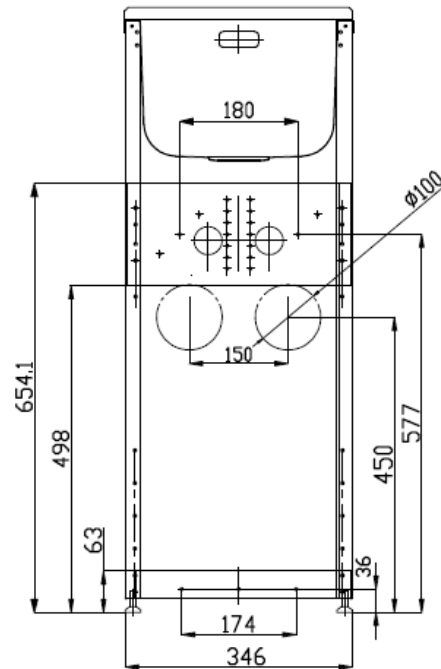

## Dimensions

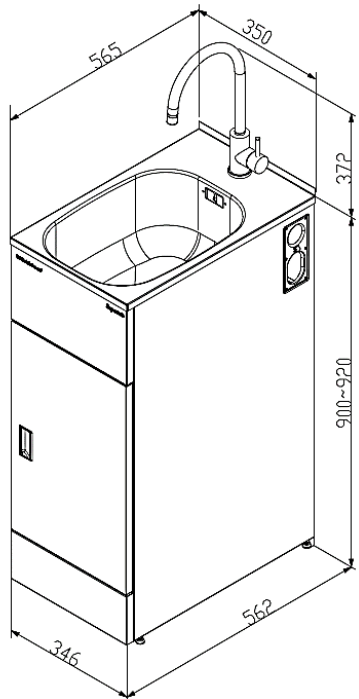

## Specifications

### Tapware

Tapware type	#304 Stainless Steel Gooseneck Tap
WELS rating	5 Stars, 5.5L per minute
Max & Min pressure	Maximum pressure 72.5 PSI (500 kPa); Minimum pressure 22 PSI (150 kPa)
Temperature range	Recommended temperature range 5° to 65°C; Maximum temperature 80°C

### Sink

Bowl type	0.8mm polished #304 Stainless Steel
Bowl capacity	24L gross capacity measured to the top; 17L capacity to overflow
Waste type/ discharge flow rate	Plug waste/ 60L per minute
Overflow/ flow rate	Yes/ 30L per minute

### Cabinet

Handle type	Recessed plastic handle
Door opening	Reversible, can be either left or right hand opening
Adjustable levelling feet	Yes
Side apertures for hoses	Yes, on both sides
3 Way ball valves isolators	Yes, included
Washing machine waste pipe	Separate
Cabinet color/finish	Satin white powder coated
Cabinet material	0.6mm galvanized steel
Maximum height of items can be stored	510mm

### Dimensions & Weights

Product dimensions (mm)	W350*D565*H(900-920)
Carton dimensions (mm)	W368*D585*H965
Gross/Net weight (Kg)	17/14

### Warranty

Tapware & Cabinet	2 years on parts & labour from the date of purchase
Sink	5 years on parts & labour from the date of purchase