



CABINET SPECIFICATION

Roxy - 750 - Wall (2 drawer)



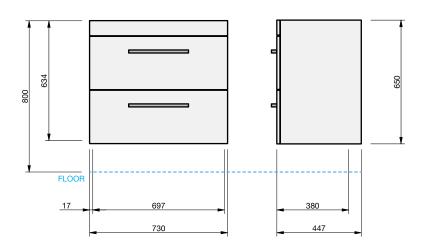


- · Drawings depict cabinet only
- It is important to decide on what height you want your finished top surface from the floor, this will determine where your plumbing will be positioned.
- We suggest that you install your wall hung vanity between 830-950mm high to the finished top surface.
- Waste outlet positioned for standard trap and pop up basin waste

INDICATES PLUMBING -----INDICATES TOP SURFACE -----

Roxy 46 Benchtop

TOP SPECIFICATION



Product Dimensions (mm)	\bigcirc	$^{\otimes}$	F
Roxy 46 Benchtop - 750	750	460	20.5

- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer

IMPORTANT NOTE: Throughout this guide, dimensions may vary by \pm 2mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit stmichel.co.nz.

DATE EDITED: 13 / 11 / 2020

D YEARS AQUAEDGE SOF